

Homework #4  
Due Su 3/07

Be sure to show all your work for credit. You must turn in your code as well as output files (**code attached at the end of the report**).


Please generate a report that contains the code and output in a single readable format using Latex.

### 0. Getting Started

- Download the homework images from the class website.  
<http://www.ee.unlv.edu/~b1morris/ecg782/hw/hw04>

1. (GW 10.6) Horizontal intensity profile
2. (GW 10.22) Hough Transform
3. (GW 10.36) Threshold segmentation
4. Thesholding

Suppose an image has the gray-level pdf shown below.  $p_1(z)$  corresponds to objects and  $p_2(z)$  to background. Assume  $P_1 = P_2$ , find the optimal threshold between object and background pixels. Be sure to derive the optimal value mathematically to get the optimal value.

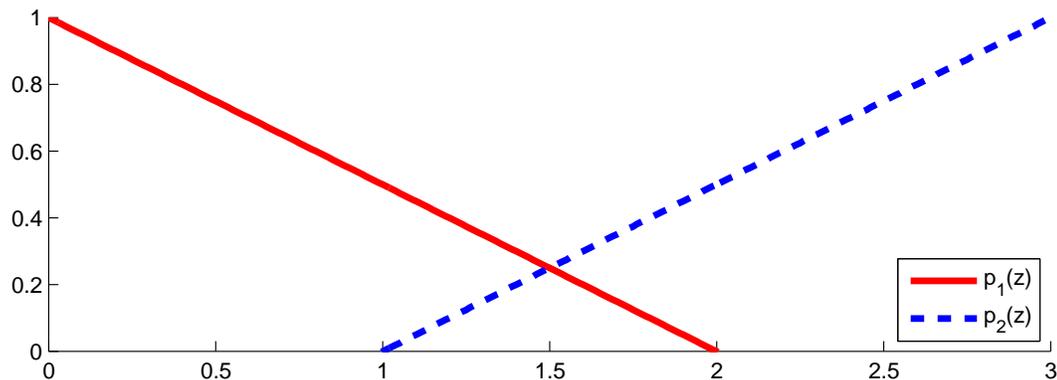

### 5. Canny Edge Detection

- (a) Give the convolution kernels for determining the gradient. You may examine the function `gradient.m` to help with the explanation. (It may be easiest to apply the `gradient` to an impulse and inspect the results).
- (b) Implement the simplified version of the Canny edge detector (no hysteresis thresholding). The syntax of the function should be

$$[E, M, A] = \text{canny}(I, \text{sig}, \text{tau}),$$

where  $E$  contains the detected edges,  $M$  the smoothed gradient magnitude,  $A$  contains the gradient angle,  $I$  is the input image, `sig` is the  $\sigma$  parameter for the smoothing filter, and `tau` is a single threshold.

- (c) Apply your Canny detector on `wirebond_mask.tif` using  $\tau = 0.8$  and  $0.6$  with the following values for  $\sigma^2 = [0.5, 1, 3]$ . Show your results in a (2,3) subplot. Invert the color, white for 0 and black for 1, to save ink. Discuss how the choice of  $\sigma$  affects the results.
  - (d) Apply your Canny detector on `city.jpg`. Adjust the  $\sigma$  and  $\tau$  parameters as you see fit. Display the resulting edges and the parameter settings used. Also use the built-in Matlab function `edge.m` with default parameters on the `city.jpg` image. Compare.
- (Bonus) Modify your Canny detector to implement hysteresis thresholding with `tau= [tauh, taul]`.

## 6. Hough Transform

- (a) Study the Matlab function `hough.m`. Compute the Hough transform of the `city.jpg` image. Display the Hough accumulator image and the original image with the top 5 lines as an overlay. Each overlay line should be a different color and a legend should be included.
  - (b) Write your own Hough transform implementation for circle detection. The function should take an image and radius as input. Test your function on the `quarters.bmp` image. Display the accumulator image and the original image with the top 3 circles as an overlay.
- (Bonus) Use gradient magnitude accumulation instead individual count.
- (Bonus) Upgrade the detector to find circles of different sizes. You may test results on the sample image `us_silver_coins.jpg`.